STARLIGHT VILLAGE SUBDIVISION DRAINAGE REPORT

FOR

City of Bryant, AR

March 2024 Mt. Carmel Rd. Bryant, AR

By:



Storm Drainage Summary for Starlight Village subdivision

The Starlight Village is a proposed residential subdivision within the City of Bryant jurisdiction. This subdivision is anticipated to be built in several phases.

Ponds C and D are designed for the total buildout. Summary of the Phase-C and D calculations are below:

Detention Pond C

- Pond is situated on the North side of the property.
- Pond has an area of 0.51 acres with bottom elevation of 369'.
- Two 36" RCP with 2.0% slope are considered for outflow culvert.
- For 100-year frequency, the peak discharges for pre-development and post development stage have been calculated as 129.49 cfs and 103.15 cfs respectively (Attachment- Pond-C).
- Peak flows for Pre and post development phase have been tabulated below-

	Pre-development Pond C	Post-development Pond C
	Peak Flow (cfs)	Peak Flow (cfs)
2-Year	64.42	55.40
10-Year	89.93	75.58
25-Year	104.75	85.49
50-Year	118.17	96.48
100-Year	129.49	103.15

Detention Pond D

- Pond is situated on the south side of the property.
- Pond has an area of 0.30 acres with bottom elevation of 362.00'.
- One 24" RCP 0.50% slope is considered for outflow culvert.
- For 100-year frequency, the peak discharges for pre-development and post development stage have been calculated as 31.99 cfs and 29.32 cfs respectively (Attachment- Pond D).
- Peak flows for Pre and post development phase have been tabulated below-

	Pre-development Pond D	Post-development Pond D
	Peak Flow (cfs)	Peak Flow (cfs)
2-Year	16.12	13.36
10-Year	22.30	19.73
25-Year	25.93	22.85
50-Year	29.33	25.70
100-Year	31.99	29.32

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Hyd. No. 1

pre-development Pond-C

Hydrograph type = Rational Peak discharge = 64.42 cfs Time to peak = 42 min Hyd. Volume = 162,337 cuft Hyd. No. 5

post-dev. Pond-C

Hydrograph type = Reservoir
Peak discharge = 55.40 cfs
Time to peak = 44 min
Hyd. Volume = 175,540 cuft

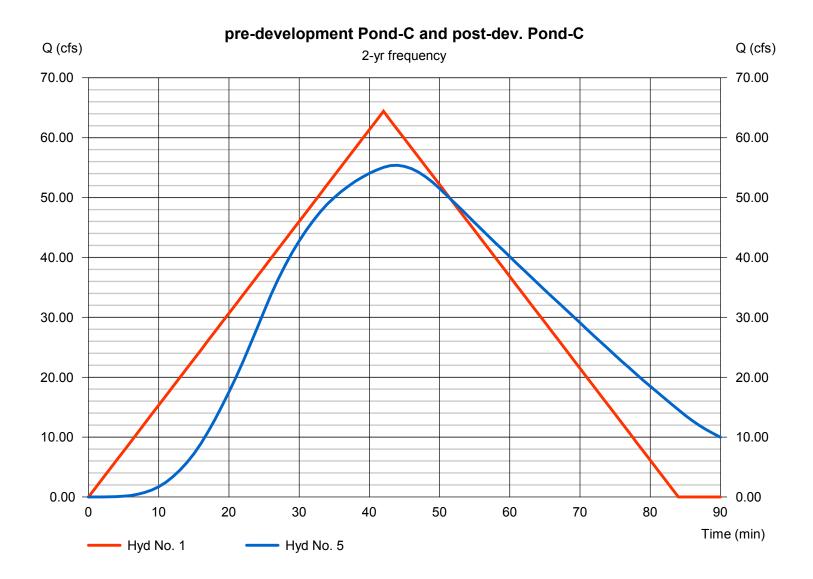

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Hyd. No. 1

pre-development Pond-C

Hydrograph type = Rational Peak discharge = 89.93 cfs Time to peak = 42 min Hyd. Volume = 226,617 cuft Hyd. No. 5

post-dev. Pond-C

Hydrograph type = Reservoir
Peak discharge = 75.58 cfs
Time to peak = 44 min
Hyd. Volume = 241,988 cuft

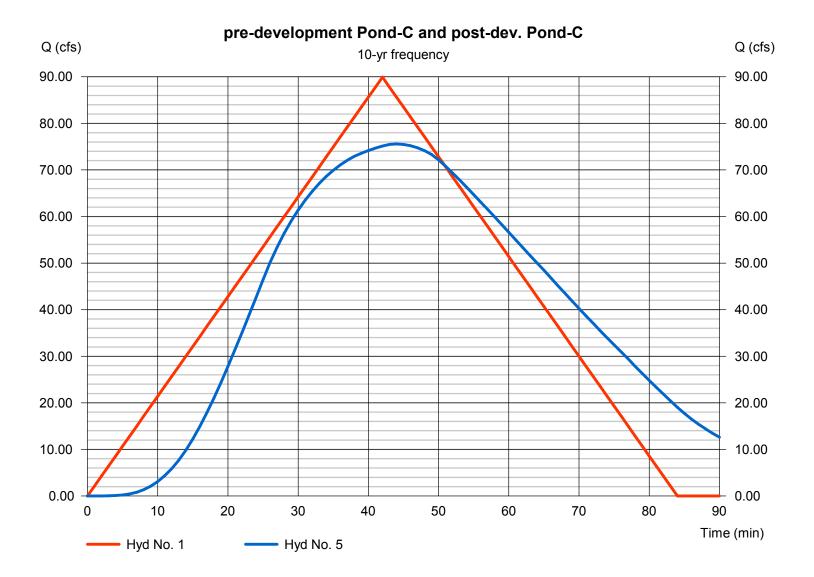

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No. 1


pre-development Pond-C

Hydrograph type = Rational Peak discharge = 104.75 cfs Time to peak = 42 min Hyd. Volume = 263,981 cuft

Hyd. No. 5

post-dev. Pond-C

Hydrograph type = Reservoir
Peak discharge = 85.49 cfs
Time to peak = 45 min
Hyd. Volume = 281,139 cuft

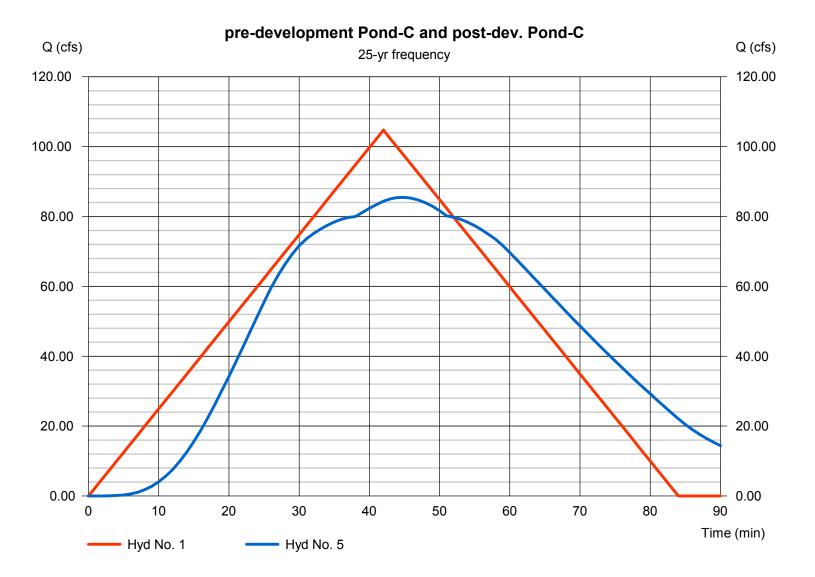

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No. 1


pre-development Pond-C

Hydrograph type = Rational Peak discharge = 118.17 cfs Time to peak = 42 min Hyd. Volume = 297,793 cuft

Hyd. No. 5

post-dev. Pond-C

Hydrograph type = Reservoir
Peak discharge = 96.48 cfs
Time to peak = 45 min
Hyd. Volume = 318,062 cuft

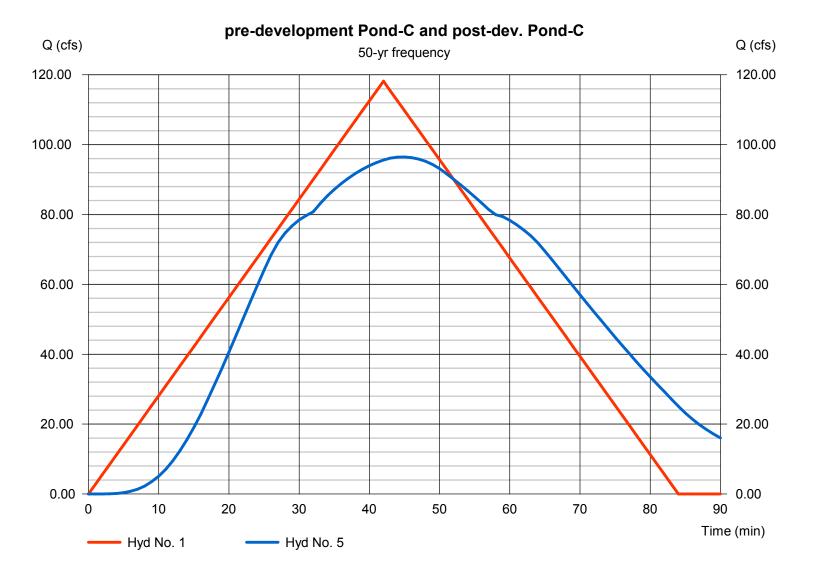

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No. 1


pre-development Pond-C

Hydrograph type = Rational Peak discharge = 129.49 cfs Time to peak = 42 min Hyd. Volume = 326,304 cuft Hyd. No. 5

post-dev. Pond-C

Hydrograph type = Reservoir
Peak discharge = 103.15 cfs
Time to peak = 45 min
Hyd. Volume = 346,406 cuft

Tryu. Volume – 540,400 cuit

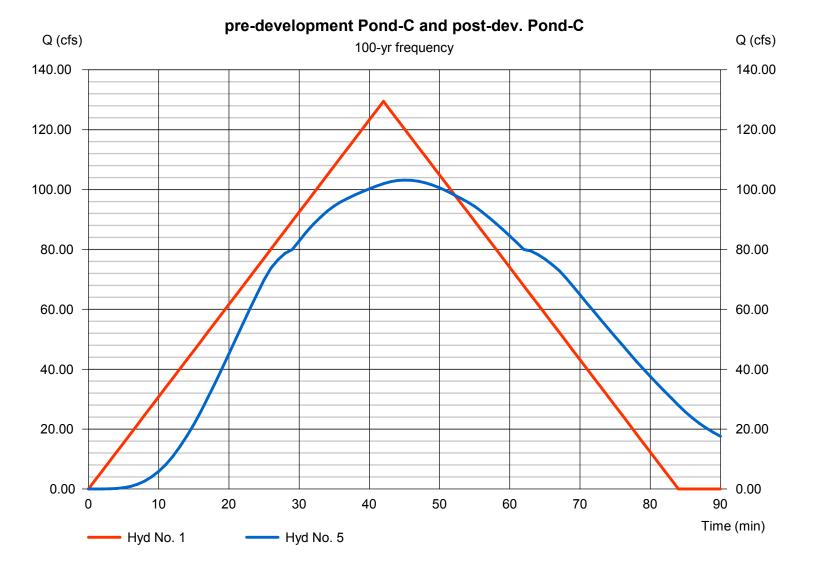

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Friday, 11 / 20 / 2020

Pond No. 1 - Pond

Pond Data

Trapezoid -Bottom L x W = 152.0 x 145.0 ft, Side slope = 3.00:1, Bottom elev. = 369.00 ft, Depth = 5.00 ft

Stage / Storage Table


Stage (ft)	Elevation (ft)	Contour area (sqft)	Incr. Storage (cuft)	Total storage (cuft)
0.00	369.00	22,040	0	0
0.50	369.50	22,940	11,244	11,244
1.00	370.00	23,858	11,699	22,943
1.50	370.50	24,794	12,162	35,105
2.00	371.00	25,748	12,635	47,740
2.50	371.50	26,720	13,116	60,856
3.00	372.00	27,710	13,607	74,463
3.50	372.50	28,718	14,106	88,569
4.00	373.00	29,744	14,615	103,184
4.50	373.50	30,788	15,132	118,316
5.00	374.00	31,850	15,659	133,975

Culvert / Orifice Structures

Weir Structures

	[A]	[B]	[C]	[PrfRsr]		[A]	[B]	[C]	[D]
Rise (in)	= 36.00	36.00	Inactive	Inactive	Crest Len (ft)	= 10.00	Inactive	Inactive	Inactive
Span (in)	= 36.00	36.00	12.00	0.00	Crest El. (ft)	= 373.00	0.00	0.00	0.00
No. Barrels	= 1	1	1	0	Weir Coeff.	= 3.33	3.33	3.33	3.33
Invert El. (ft)	= 369.00	369.00	369.00	0.00	Weir Type	= Rect			
Length (ft)	= 131.00	41.00	41.00	0.00	Multi-Stage	= No	No	No	No
Slope (%)	= 2.00	2.00	2.00	n/a					
N-Value	= .013	.013	.013	n/a					
Orifice Coeff.	= 0.60	0.60	0.60	0.60	Exfil.(in/hr)	= 0.000 (by	Contour)		
Multi-Stage	= n/a	No	No	No	TW Elev. (ft)	= 0.00			

Note: Culvert/Orifice outflows are analyzed under inlet (ic) and outlet (oc) control. Weir risers checked for orifice conditions (ic) and submergence (s).

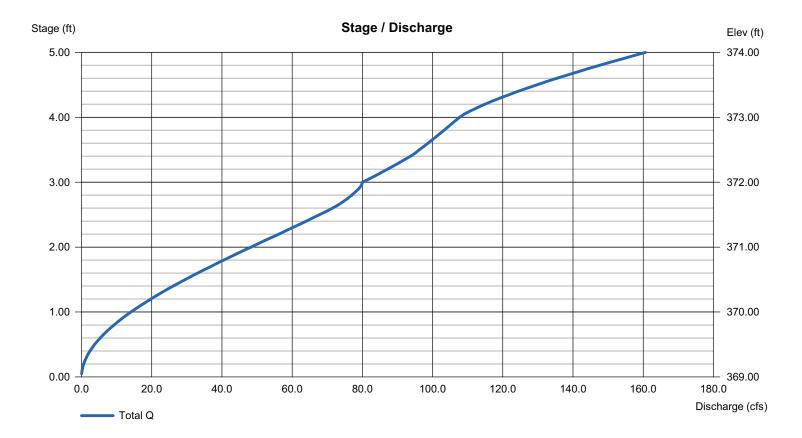

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	64.42	1	42	162,337				pre-development Area-A
2	Rational	48.30	1	42	121,707				Post Development area-D
3	Rational	35.91	1	25	53,862				Post Development area-E
4	Combine	64.66	1	25	175,569	2, 3			Post Development Combination
5	Reservoir	55.40	1	44	175,540	4	371.18	52,485	123
	vised POND-					Period: 2 Y		Friday, 11	


	ional	89.93 67.42 48.08 88.21	1 1 1	42 42	226,617				
3 Ratio	ional mbine	48.08		42	1				pre-development Area-A
4 Com	mbine		1	72	169,899				Post Development area-D
		88.21	'	25	72,118				Post Development area-E
5 Rese	servoir		1	25	242,017	2, 3			Post Development Combination
		75.58	1	44	241,988	4	371.74	67,459	123

lyd. lo.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
	Rational	104.75	1	42	263,981				pre-development Area-A
	Rational	78.54	1	42	197,911				Post Development area-D
3	Rational	55.50	1	25	83,257				Post Development area-E
4	Combine	102.25	1	25	281,168	2, 3			Post Development Combination
5	Reservoir	85.49	1	45	281,139	4	372.15	78,764	123
Revised POND-C.gpw				Return F	eriod: 25 `	⊥ Year	Friday, 11	/ 20 / 2020	

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	118.17	1	42	297,793				pre-development Area-A
2	Rational	88.60	1	42	223,261				Post Development area-D
3	Rational	63.22	1	25	94,830				Post Development area-E
4	Combine	115.96	1	25	318,091	2, 3			Post Development Combination
5	Reservoir	96.48	1	45	318,062	4	372.51	88,842	123

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	129.49	1	42	326,304				pre-development Area-A
2	Rational	97.08	1	42	244,636				Post Development area-D
3	Rational	67.87	1	25	101,799				Post Development area-E
4	Combine	125.65	1	25	346,435	2, 3			Post Development Combination
5	Reservoir	103.15	1	45	346,406	4	372.80	97,255	123

Watershed Model Schematic

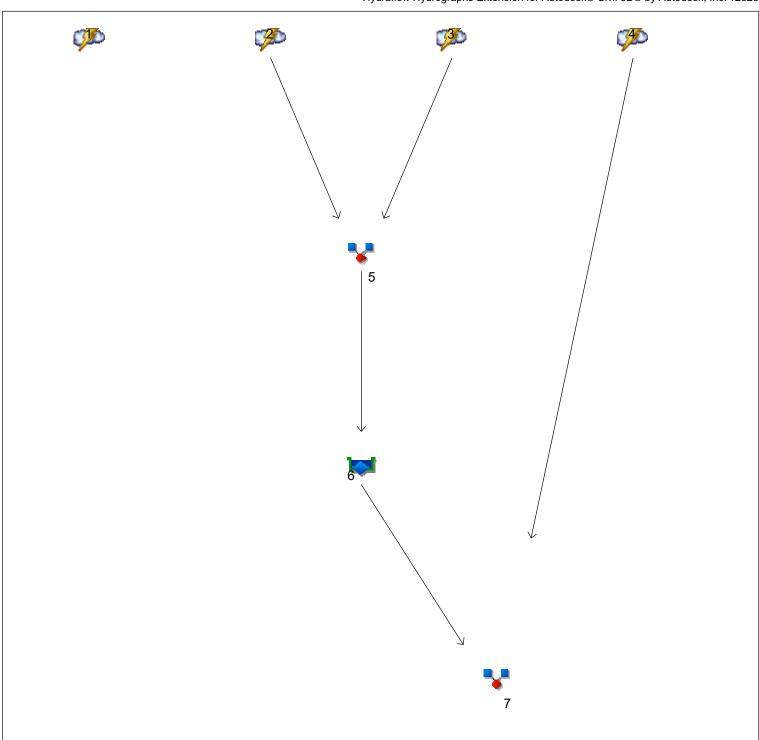

Legend

<u>Origin</u>	<u>Description</u>
Rational	Pre-development Flow
Rational	Development Generated Flow-D
Rational	Development Generated Flow-E
Rational	<no description=""></no>
Combine	<no description=""></no>
Reservoir	Detention Pond
Combine	Post-development Flow
	Rational Rational Rational Rational Combine Reservoir

Project: Revised_POND-D-03-12-2024.gpw

Wednesday, 03 / 13 / 2024

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2023

Hyd. No. 1

Pre-development Flow

Hydrograph type = Rational Peak discharge = 16.12 cfs Time to peak = 38 min Hyd. Volume = 36,750 cuft

Hyd. No. 7

Post-development Flow

Hydrograph type = Combine
Peak discharge = 13.36 cfs
Time to peak = 41 min
Hyd. Volume = 55,457 cuft



Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2023

Hyd. No. 1

Pre-development Flow

Hydrograph type = Rational Peak discharge = 22.30 cfs Time to peak = 38 min Hyd. Volume = 50,851 cuft

Hyd. No. 7

Post-development Flow

Hydrograph type = Combine
Peak discharge = 19.73 cfs
Time to peak = 39 min
Hyd. Volume = 74,666 cuft



Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2023

Hyd. No. 1


Pre-development Flow

Hydrograph type = Rational Peak discharge = 25.93 cfs Time to peak = 38 min Hyd. Volume = 59,126 cuft

Hyd. No. 7

Post-development Flow

Hydrograph type = Combine
Peak discharge = 22.85 cfs
Time to peak = 38 min
Hyd. Volume = 86,308 cuft

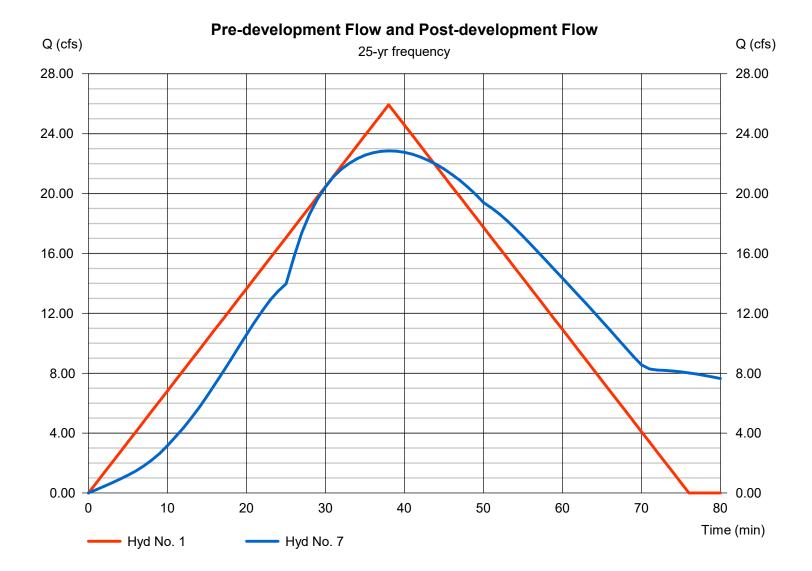

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2023

Hyd. No. 1


Pre-development Flow

Hydrograph type = Rational Peak discharge = 29.33 cfs Time to peak = 38 min Hyd. Volume = 66,871 cuft

Hyd. No. 7

Post-development Flow

Hydrograph type = Combine
Peak discharge = 25.70 cfs
Time to peak = 38 min
Hyd. Volume = 98,231 cuft

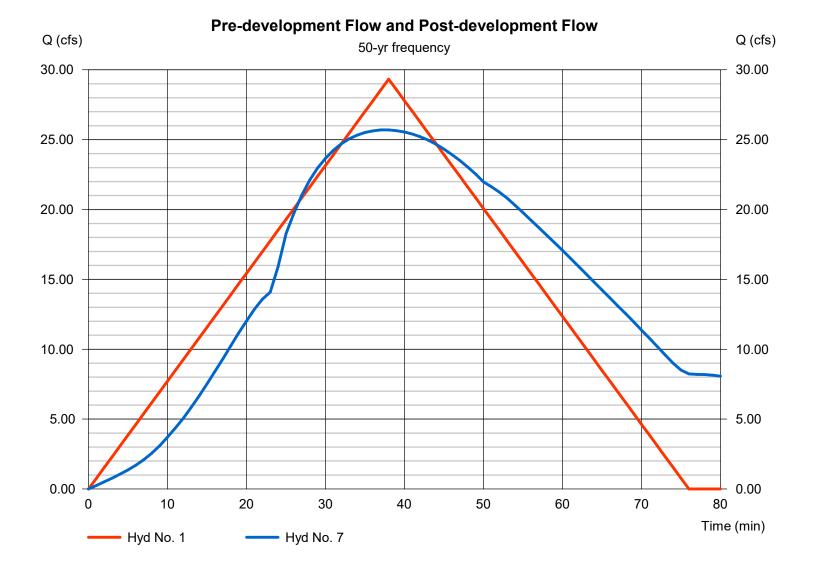

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2023

Hyd. No. 1


Pre-development Flow

Hydrograph type = Rational Peak discharge = 31.99 cfs Time to peak = 38 min Hyd. Volume = 72,927 cuft

Hyd. No. 7

Post-development Flow

Hydrograph type = Combine
Peak discharge = 29.32 cfs
Time to peak = 40 min
Hyd. Volume = 105,697 cuft

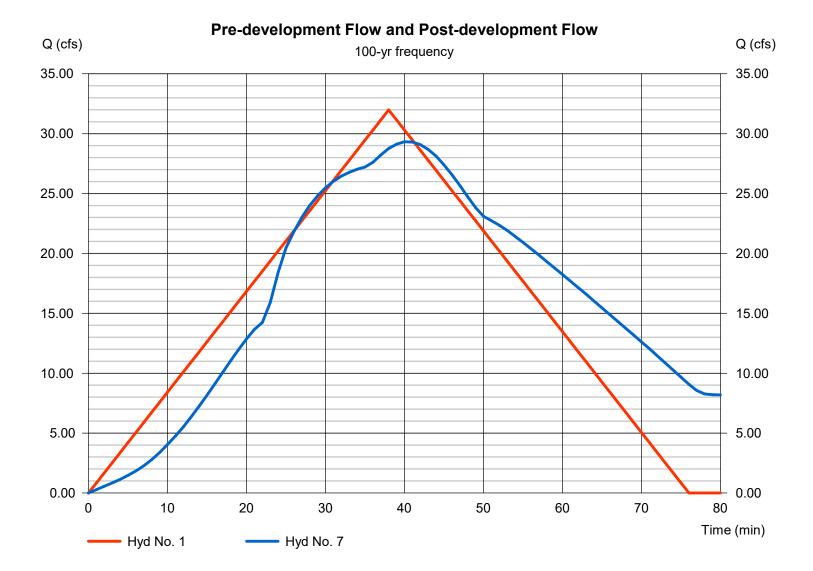

Pond No. 2 - Pond-D

Pond Data

Trapezoid -Bottom L x W = 130.0 x 100.0 ft, Side slope = 3.00:1, Bottom elev. = 362.00 ft, Depth = 4.50 ft

Stage / Storage Table


Stage (ft)	Elevation (ft)	Contour area (sqft)	Incr. Storage (cuft)	Total storage (cuft)
0.00	362.00	13,000	0	0
0.45	362.45	13,628	5,991	5,991
0.90	362.90	14,271	6,277	12,268
1.35	363.35	14,929	6,569	18,837
1.80	363.80	15,601	6,869	25,706
2.25	364.25	16,287	7,174	32,880
2.70	364.70	16,988	7,486	40,366
3.15	365.15	17,704	7,805	48,172
3.60	365.60	18,435	8,131	56,302
4.05	366.05	19,179	8,463	64,765
4.50	366.50	19,939	8,801	73,566

Culvert / Orifice Structures

Weir Structures

	[A]	[B]	[C]	[PrfRsr]		[A]	[B]	[C]	[D]
Rise (in)	= 24.00	Inactive	Inactive	Inactive	Crest Len (ft)	= 10.00	Inactive	Inactive	Inactive
Span (in)	= 24.00	0.00	0.00	0.00	Crest El. (ft)	= 365.50	0.00	0.00	0.00
No. Barrels	= 1	1	0	0	Weir Coeff.	= 3.33	3.33	3.33	3.33
Invert El. (ft)	= 362.00	0.00	0.00	0.00	Weir Type	= Rect			
Length (ft)	= 42.00	0.00	0.00	0.00	Multi-Stage	= No	No	No	No
Slope (%)	= 0.50	0.00	0.00	n/a					
N-Value	= .013	.013	.013	n/a					
Orifice Coeff.	= 0.60	0.60	0.60	0.60	Exfil.(in/hr)	= 0.000 (by	Wet area)		
Multi-Stage	= n/a	No	No	No	TW Elev. (ft)	= 0.00			

Note: Culvert/Orifice outflows are analyzed under inlet (ic) and outlet (oc) control. Weir risers checked for orifice conditions (ic) and submergence (s).

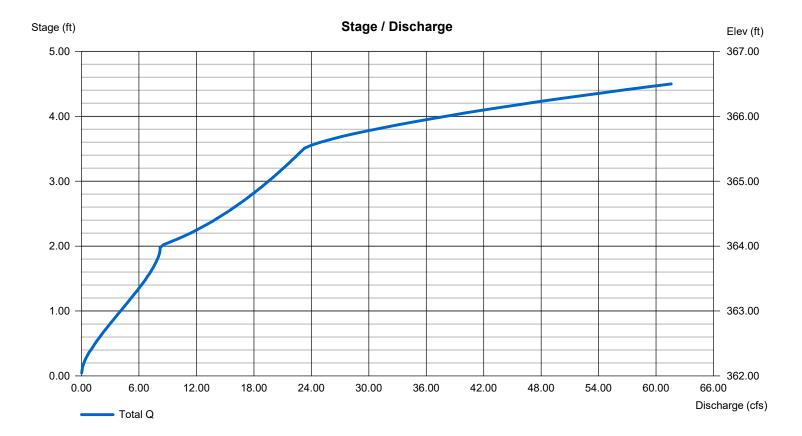

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	16.12	1	38	36,750				Pre-development Flow
2	Rational	1.245	1	30	2,241				Development Generated Flow-D
3	Rational	29.51	1	27	47,814				Development Generated Flow-E
4	Rational	3.632	1	25	5,448				<no description=""></no>
5	Combine	30.64	1	27	50,055	2, 3,			<no description=""></no>
6	Reservoir	12.21	1	43	50,009	5	364.26	33,102	Detention Pond
7	Combine	13.36	1	41	55,457	4, 6			Post-development Flow
	/ised_POND-	D-03-12-3	2024 anv	v	Return F	Period: 2 Ye	ear	Wednesda	y, 03 / 13 / 2024

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	22.30	1	38	50,851				Pre-development Flow
2	Rational	1.689	1	30	3,041				Development Generated Flow-D
3	Rational	39.74	1	27	64,376				Development Generated Flow-E
4	Rational	4.863	1	25	7,295				<no description=""></no>
5	Combine	41.26	1	27	67,417	2, 3,			<no description=""></no>
6	Reservoir	17.89	1	43	67,371	5	364.81	42,201	Detention Pond
7	Combine	19.73	1	39	74,666	4, 6			Post-development Flow
Rev	vised_POND-	D-03-12-2	2024.gpv	V	Return F	Period: 10 Y	⁄ear	Wednesda	y, 03 / 13 / 2024

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	25.93	1	38	59,126				Pre-development Flow
2	Rational	1.956	1	30	3,521				Development Generated Flow-D
3	Rational	45.93	1	27	74,411				Development Generated Flow-E
4	Rational	5.614	1	25	8,422				<no description=""></no>
5	Combine	47.69	1	27	77,932	2, 3,			<no description=""></no>
6	Reservoir	20.65	1	43	77,886	5	365.14	48,075	Detention Pond
7	Combine	22.85	1	38	86,308	4, 6			Post-development Flow
Re	vised_POND	 -D-03-12-	⊥ 2024.gp\	v	Return	Period: 25 `	Year	Wednesda	ay, 03 / 13 / 2024

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	29.33	1	38	66,871				Pre-development Flow
2	Rational	2.223	1	30	4,001				Development Generated Flow-D
3	Rational	52.27	1	27	84,683				Development Generated Flow-E
4	Rational	6.395	1	25	9,592				<no description=""></no>
5	Combine	54.27	1	27	88,685	2, 3,			<no description=""></no>
6	Reservoir	23.17	1	43	88,639	5	365.49	54,345	Detention Pond
7	Combine	25.70	1	38	98,231	4, 6			Post-development Flow
	vised_POND-								

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	31.99	1	38	72,927				Pre-development Flow
2	Rational	2.401	1	30	4,322				Development Generated Flow-D
3	Rational	56.25	1	27	91,125				Development Generated Flow-E
4	Rational	6.865	1	25	10,297				<no description=""></no>
5	Combine	58.41	1	27	95,446	2, 3,			<no description=""></no>
6	Reservoir	26.89	1	42	95,400	5	365.68	57,764	Detention Pond
7	Combine	29.32	1	40	105,697	4, 6			Post-development Flow
Rev	vised_POND-	D-03-12-2	2024.apv	v	Return F	Period: 100	Year	Wednesda	y, 03 / 13 / 2024